

Isuzu Diesel Engines



4JJ1X

Generator: 101 HP @ 1800 RPM

Industrial Drive: 131 HP @ 2500 RPM

Standard features:


- U.S. EPA Tier 3
- Displacement: 3.0 L
- Turbo charged & charge air cooled
- Peak torque: 310.0 LB/FT @ 2000 RPM
- Fuel consumption: .335 LB/HP-HR
- Flywheel housing: SAE 3
- Electric & self-priming fuel lift pump
- 12V and 24V available
- Glow plug starting aid
- High angularity oil pan
- 500-hour service intervals
- 5-year / 5,000-hour warranty

The power behind it all.




ISUZU

DIESEL

4JJ1X Industrial Performance Curves:

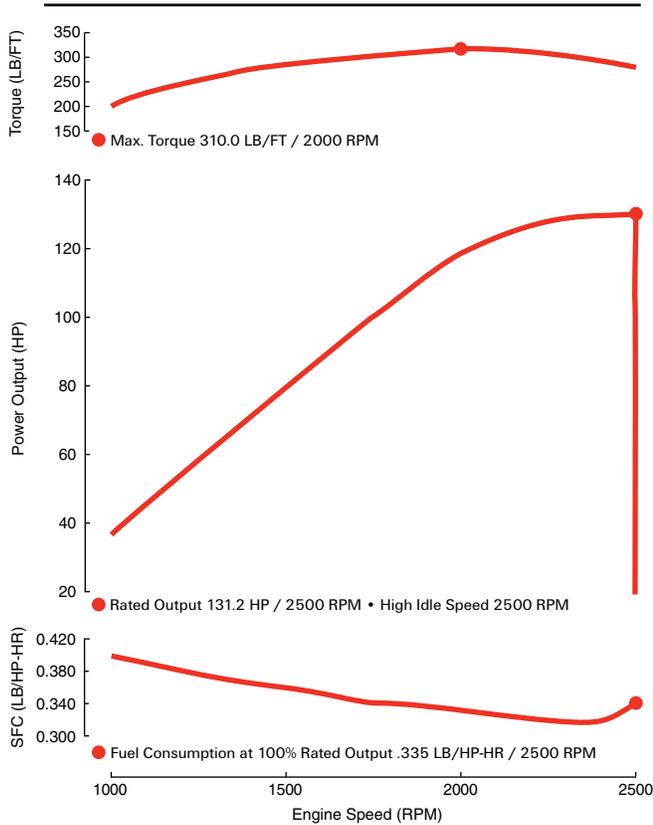

4JJ1X Genset Performance Curves:

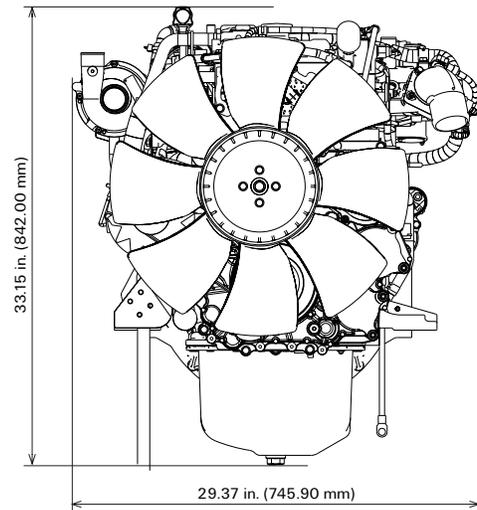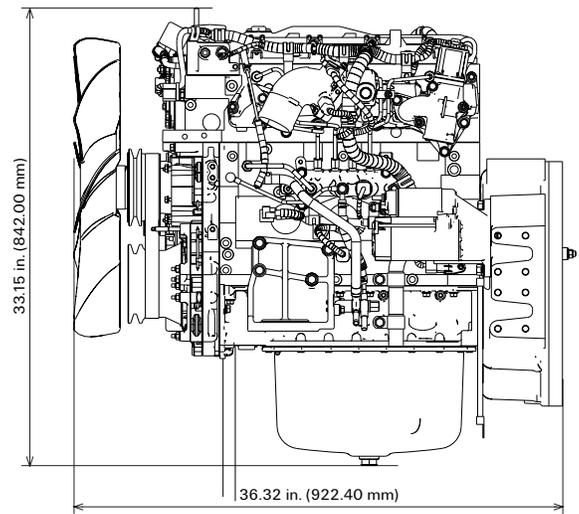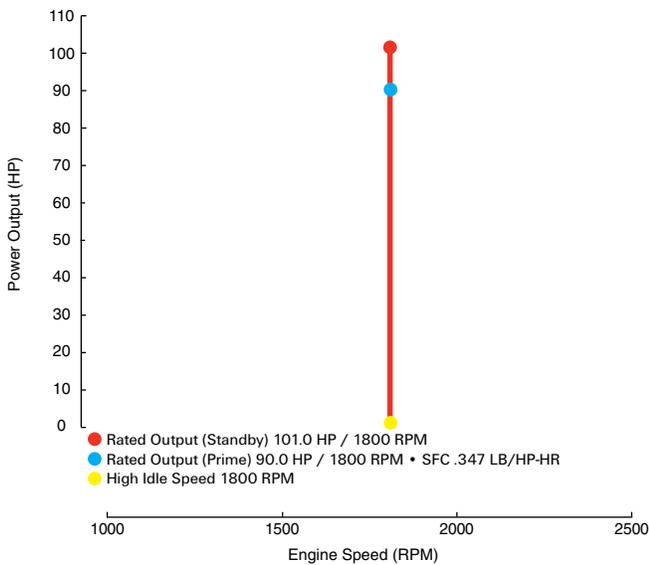

Available options:

- Cooling system
- Air cleaner
- Exhaust system
- Front and rear mounts
- Skid base
- Instrument panel & extension harness
- Custom power unit

Horsepower comparison:

Engine Model	Cylinders	Displacement (L)	HP Range
4JJ1T	4	3.0	65-90
4JJ1X	4	3.0	75-130
4HK1X	4	5.2	150-200

For additional information, please contact your local distributor or visit www.isuzuengines.com

Isuzu Motors America, Inc.

46401 Commerce Center Drive
 Plymouth, Michigan 48170
 Phone: 734.582.9470
 Fax: 734.455.7581