

MARINE

Commercial

N67

N67 280

191 kW

Rating type B: 191 kW (260 HP) @ 2800 rpm
Rating type C: 169 kW (230 HP) @ 2800 rpm
Rating type D: 132 kW (180 HP) @ 2500 rpm

SPECIFICATIONS

Thermodynamic cycle		Diesel 4 stroke
Air Feeding		TCA
Cylinders arrangement		6L
Bore x Stroke	millimeters	104 x 132
Total displacement	liters	6.7
Valves per cylinder	number	2
Cooling System		liquid
Direction of Rotation (viewed facing flywheel)		CCW
Engine management		mechanical
Injection System		MPI


STANDARD CONFIGURATION

Flywheel housing	type	SAE 3
Flywheel size	inch	11" ½
Air filter		rear side
Turbocharger	Fixed Geometry (water cooled) Turbo with Aftercooler (TCA)	
Heat exchanger		tube type
Exhaust gas water mixer - Exhaust cooled elbow		-
Water charge tank		included
Fuel filter	number	1 - left side
Fuel prefilter		included (loose)
Fuel pump		included
Oil filter	number	1 - right side
Oil sump		aluminium
Oil vapours blow-by circuit		rear
Oil heat exchanger		built in the crankcase
Oil filler		by cylinder head cover
Starter		12V - 3kW
Alternator		12 V - 90 A
Engine stop device		electrical excitation
Wiring harness		with negative to ground connection
Painting color		white "ICE"

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1072 x 749 x 800
Dry Weight	Kg	605

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

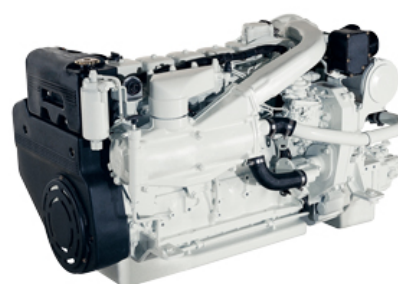

COMMERCIAL

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

ELECTRICAL SYSTEM

Voltage	V	12
---------	---	----

NOT INCLUDED IN STANDARD CONFIGURATION

Battery - minimum capacity recommended	Ah	120 Ah
Battery - minimum cold cranking capacity recommended	Ah	900 Ah

Do you want to know more?

LEGEND

Arrangement	Air Handling	Turbocharger	Injection System	Exhaust System
L (in line)	TC (Turbocharged)	WG (Wastegate)	M (Mechanical)	EGR (Exhaust Gas Recirculation)
V (90° "V" configuration)	NA (Naturally Aspirated)	VGT (Variable Geometry Turbocharger)	CR (Common Rail)	SCR (Selective Catalytic Reduction)
	TCA (Turbocharged with aftercooler)	TST (Twin Stage Turbocharger)	EUI (Electronic Unit Injector)	
			MPI (Multi Point Injection)	

A1 High Performance Crafts. Full throttle operation restricted within 10% of total use period. Cruising speed at engine rpm <90% of rated speed setting - Maximum usage 300 hours per year.
A2/B1 Pleasure Commercial Vessels. Full throttle operation restricted within 10% of total use period. Cruising speed at engine rpm <90% of rated speed setting - Maximum usage 1000 hours per year.

B Light Duty: Full throttle operation restricted within 10% of use period. Cruising speed at engine rpm <90% of rated speed setting - Maximum usage 1500 hours per year.
C Medium Duty: Full throttle operation < 25% of use period. Cruising speed at engine rpm <90% of rated speed setting - Maximum usage 3000 hours per year.
D Heavy Duty


FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE



RATING TYPE		B	C	D
Maximum power [*]	kW (HP)	191 (260)	169 (230)	132 (180)
At speed	rpm	2800	2800	2500
Maximum no load governed speed at max rating	rpm	3150	3150	3150
Minimum idling speed	rpm	650	650	650
Mean piston speed at rated speed	m/s	12.3	12.3	11
BMEP at max power	bar	15.2	11.2	11.3
Specific fuel consumption (best value)	g/kWh @ rpm	214 @ 2000	214 @ 2000	214 @ 2000
IMO Marpol Tier 2 (IMO Annex VI Technical Code 2008)		✓	✓	✓
RCD Stage 2 (2013/53/EC)		-	-	-
IWW Stage V (EU 2016/1628)		-	-	-
EPA Tier 3 Commercial		-	-	-
EPA Tier 3 Recreational		-	-	-
China GB I (GB15097-2016)		-	-	-
China GB II (GB15097-2016)		-	-	-
Oil consumption at max rating	(% of fuel cons.)	= 0.2	= 0.2	= 0.2
Minimum starting temperature without auxiliaries	°C	-15°	-15°	-15°
Oil and oil filter maintenance interval for replacement	hours	600	600	600
* Net Power at flywheel according to ISO 8665, after 50 hours running, Fuel Diesel EN 590. Power tolerance 5%.				

POWER & TORQUE

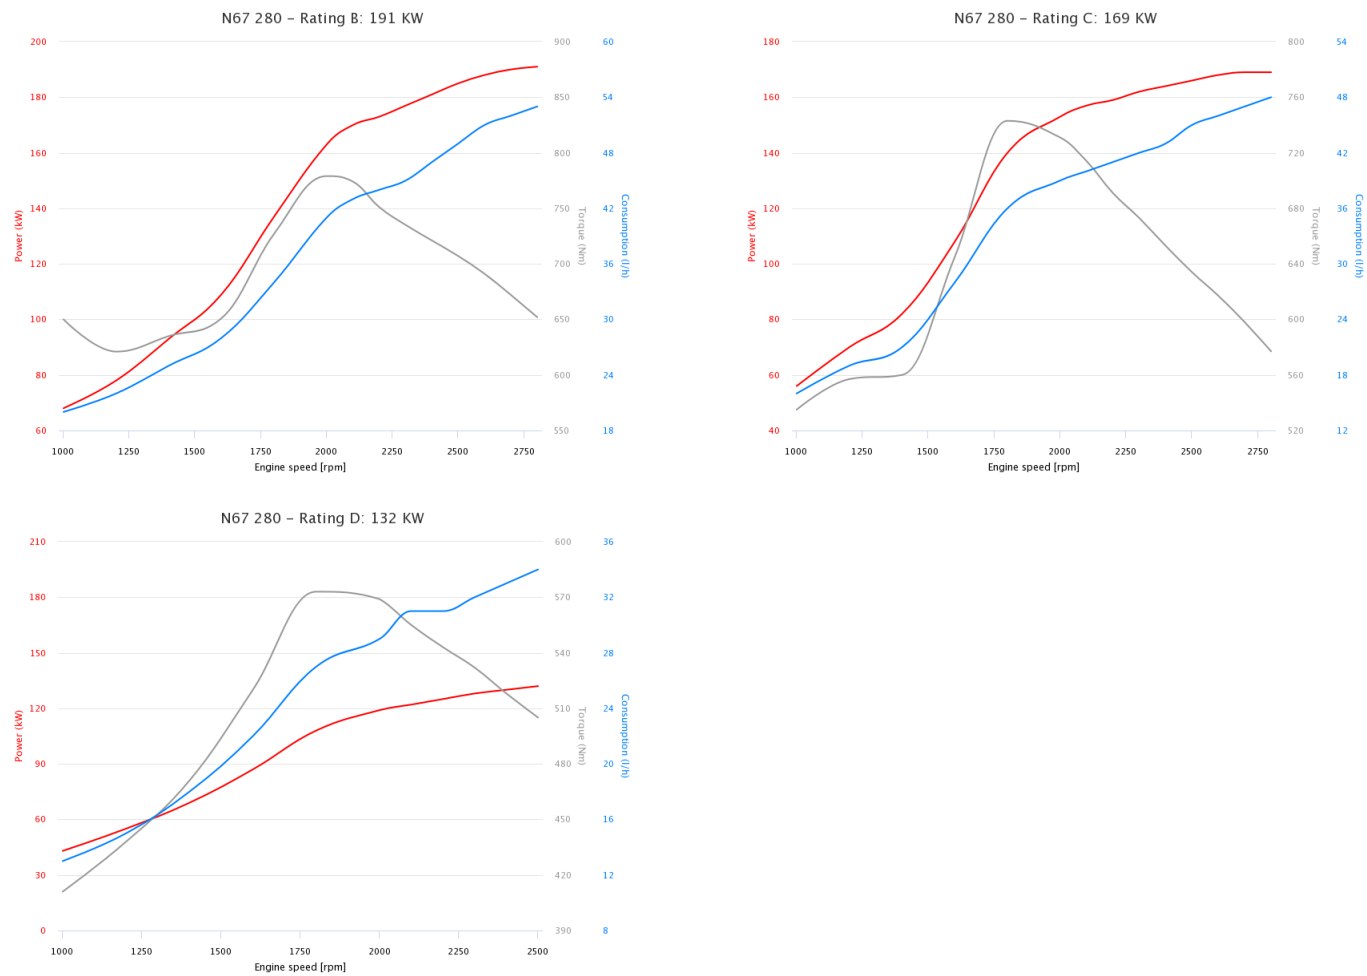

LEGEND

Arrangement	Air Handling	Turbocharger	Injection System	Exhaust System
L (in line)	TC (Turbocharged)	WG (Wastegate)	M (Mechanical)	EGR (Exhaust Gas Recirculation)
V (90° "V" configuration)	NA (Naturally Aspirated)	VGT (Variable Geometry Turbocharger)	CR (Common Rail)	SCR (Selective Catalytic Reduction)
	TCA (Turbocharged with aftercooler)	TST (Twin Stage Turbocharger)	EUI (Electronic Unit Injector)	
			MPI (Multi Point Injection)	

A1 High Performance Crafts. Full throttle operation restricted within 10% of total use period. Cruising speed at engine rpm <90% of rated speed setting - Maximum usage 300 hours per year.

A2/B1 Pleasure Commercial Vessels. Full throttle operation restricted within 10% of total use period. Cruising speed at engine rpm <90% of rated speed setting - Maximum usage 1000 hours per year.

B Light Duty: Full throttle operation restricted within 10% of use period. Cruising speed at engine rpm <90% of rated speed setting - Maximum usage 1500 hours per year.

C Medium Duty: Full throttle operation < 25% of use period. Cruising speed at engine rpm <90% of rated speed setting - Maximum usage 3000 hours per year.

D Heavy Duty

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

