


ISUZU 3CD1

32.7 Horsepower
Industrial Diesel

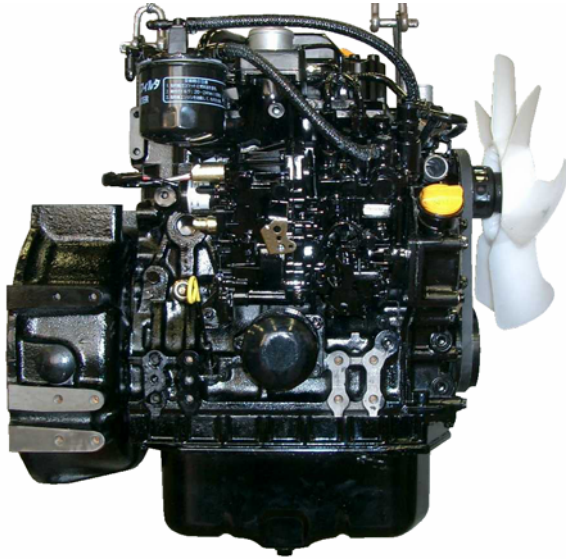

MAIN SPECIFICATIONS

Type	3 Cylinder, 4 Cycle, Water Cooled, OHV, In- Line, Direct Injection,
Bore & Stroke	3.30 x 3.54 in. (84mm x 90mm)
Engine Displacement	1.5 L
Compression Ratio	19.0:1
Dry Weight	341 lb. (155 kg)
Dimensions (L x W x H)	23.89 x 20.39 x 26.85 in. (607 x 518 x 682mm)
Coolant Capacity	2.13 qt. (2 L)
Lube Oil Capacity	7.14 qt. (6.7 L) (less filter)

MAIN FEATURES

Alternator	12V – 40A
Voltage Regulator	Internal
Starter	12V – 1.7kW
Exhaust Outlet	Rear Upward
Air Inlet	Center Upward
Flywheel Housing	SAE #5 Type
Flywheel	SAE Type for 7.5"
Oil Pan	30° Inclination All Directions
Fan	14.17 in. (360mm) Suction

INDUSTRIAL RATING*

Rated Output	32.7 BHP @ 3000 RPM
Max Torque	72.2 lb. ft. @ 1200 RPM


*SAE J1995 Gross BHP

Specifications subject to change without notice.

ISUZU

PERFORMANCE CURVE
3CD1-DZP01/02/03
Rated Power 32.7HP/3000min⁻¹

INCUBANT NO.	IS-03-013 0
APPLICATION	ISUZU INDUSTRIAL STANDARD
CONDITION	4 (S.D.O.D. (NET))
COOLING FAN	WITH#360-S-PULLER P/R#1.0
AIR CLEANER	WITH (6 inch)
SILENCER EXH.	WITH (128004-13800)
AC GENERATOR	WITH

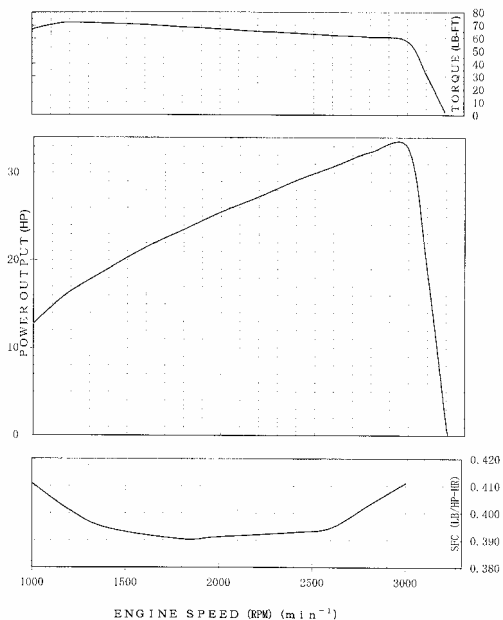

ISUZU MOTORS AMERICA, INC.
PowerTrain Division

ISUZU
DIESEL

46401 Commerce Center Drive • Plymouth, MI 48170
PHONE: 734.582.9470 • FAX: 734.455.7581
www.isuzuengines.com