

SPECIFICATIONS



No. of cylinders / valves	6L / 4	
Injection System	COMMON RAIL 1600 bar	
Turbocharger	WG	
Displacement	liters	6.7
Bore x Stroke	millimeters	104 x 132
Rated power	kW (HP) @ rpm	175 (238) @ 2200
Max Torque	Nm @ rpm	1020 @ 1500
ATS	-	
Certification	Stage III A - Tier 3	

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1708 x 789 x 1222
Dry Weight	Kg	530

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

POWER & TORQUE

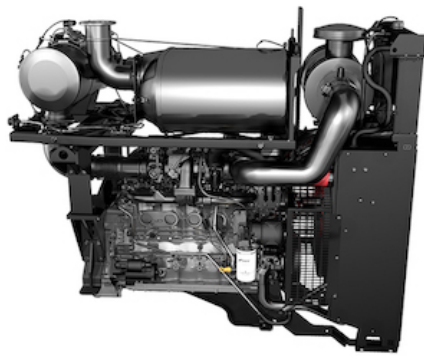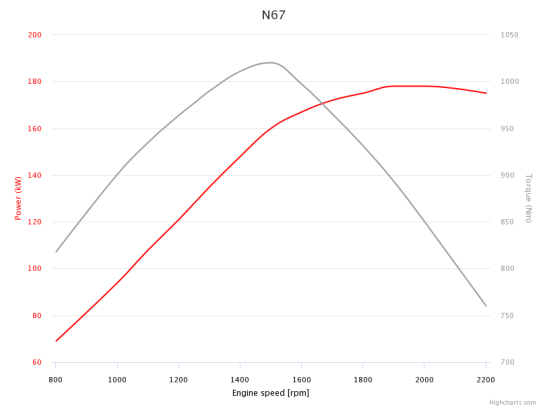

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER UNITS

Do you want to know more?



LEGEND

Air Handling

- TCA (Turbocharged with aftercooler)
- TC (Turbocharged)
- NA (Naturally Aspirated)

Turbocharger

- WG (Wastegate)
- VGT (Variable Geometry Turbocharger)
- TST (Twin Stage Turbocharge)

Exhaust System

- EGR (Exhaust Gas Recirculation)
- SCR (Selective Catalytic Reduction)
- DOC (Diesel Oxidation Catalyst)
- DPF (Diesel Particulate Filter)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

